




Auto-Kote

Two-Sided Laminator

Service Manual

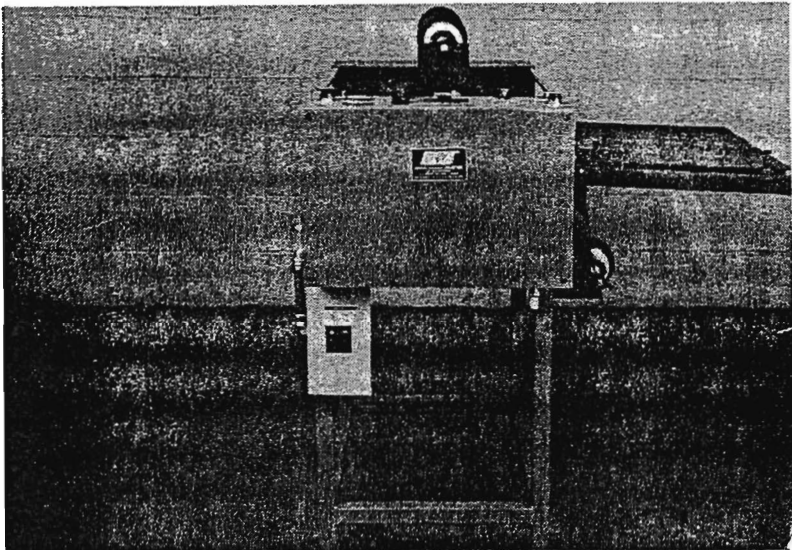

2.0 Specifications


| | |
|----------------------------------|--|
| Required Power Supply: | 220 VAC - two wire service plus neutral and ground 60 Hertz Single Phase 40 Amp Circuit |
| Dimensions: | 46" Wide (1270mm) 20" Long (812mm) 40" Long - With hand feed tray 47" High (1422mm) |
| Shipping Weight: | 250 Lbs (112.5 kg) |
| Film Width: | Up to 27" (685mm) |
| Film Length: | 1.5 mil 6000 feet (1800mm) 3 mil 3000 (9000mm) 5 mil 2000 (6000mm) 10 mil 500 (1500mm) |
| Film Thickness: | 1.5 mil thru 10 mil - Both sides |
| Speed: | Adjustable from 1 foot to 25 feet per minute (105mm per minute) |
| Sheet Thickness Range: | 80 Lb. Enamel to .024 Board |
| External Air Requirement: | 1 CFM (free air) at 80 PSI with storage tank - 1/4 H.P. |
| Compatible Equipment: | D&K Accumatic II (cutter) & AccuFeed I (feeder) & AccuFeed II Semi-Automatic Feeder |



ACCU FEED I[®]

AUTOMATIC FEEDER

Service Manual

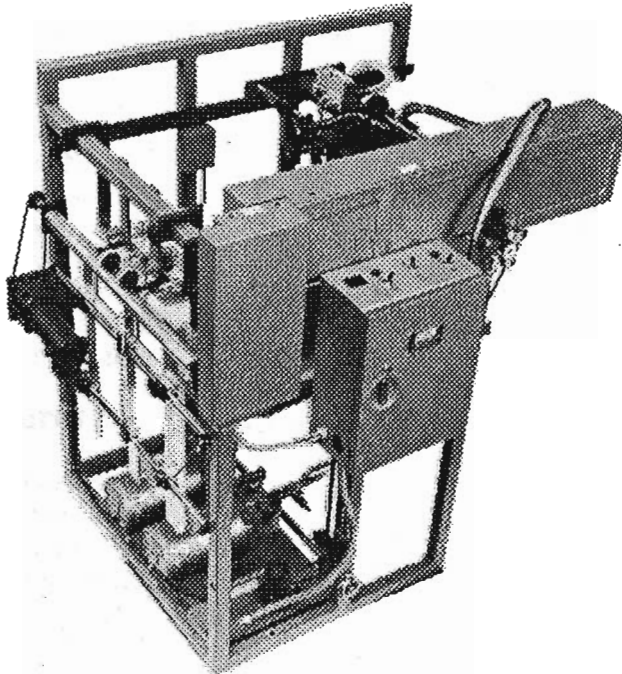

2.0 Specifications

| | |
|----------------------------------|---|
| Required power supply: | 115 VAC - two wire service plus ground 60 Hertz Single Phase 15 Amp Circuit |
| Dimensions: | 42" Wide 48" Long 52" High |
| Shipping Weight: | 550 Lbs with Belt Assembly |
| Accuracy: | + or - 1/16 Total Variance |
| Load Capacity: | 19" Maximum pile height |
| Sheet Size Capacity: | 8 1/2" x 11" to 26" x 30" |
| Sheet Thickness Range: | 50 lb Offset to 30 point Board |
| External Air Requirement: | 1 CFM (free air) at 60 PSI with storage tank - 1/4 H.P. |
| Compatible Laminators: | D&K Double Kote , Ledco and G.B.C. brands |